

# CS265P

Powered, ultra-compact sub-bass

## features

- ▶ Self powered sub-bass
- ▶ Low profile, ultra-compact enclosure
- ▶ Twin 6.5" (165mm) drivers
- ▶ Brackets for wall/ceiling mounting

## applications

- ▶ Background music playback in clubs and bars
- ▶ AV presentations
- ▶ Retail stores



architectural

A powerful sub-bass compliments the versatile Contractor Series. The ultra-compact sub provides extended low frequency, delivering acoustic warmth and impact in commercial environments where music is an important factor in creating the right image and atmosphere. Primary applications are retail stores, restaurants, hotels and audio-visual suites.

The CS265P sub-bass incorporates a 150 watt amplifier module, together with two 6.5" drivers, complementing the mid-high of the C115 and C516. A typical systems configuration comprises surface-mounted C115s or flush ceiling-mounted C516s finished to blend with the interior, used in conjunction with a strategically located CS265P.

Century Point, Halifax Road, Cressex Business Park,  
High Wycombe, Buckinghamshire HP12 3SL, England.  
Telephone: +44 (0)1494 535312 Facsimile: +44 (0)1494 438669  
E-mail: [info@martin-audio.com](mailto:info@martin-audio.com)  
All information is Copyright © 2003 Martin Audio Ltd.




# CS265P

Powered, ultra-compact sub-bass

overall dimensions

architectural

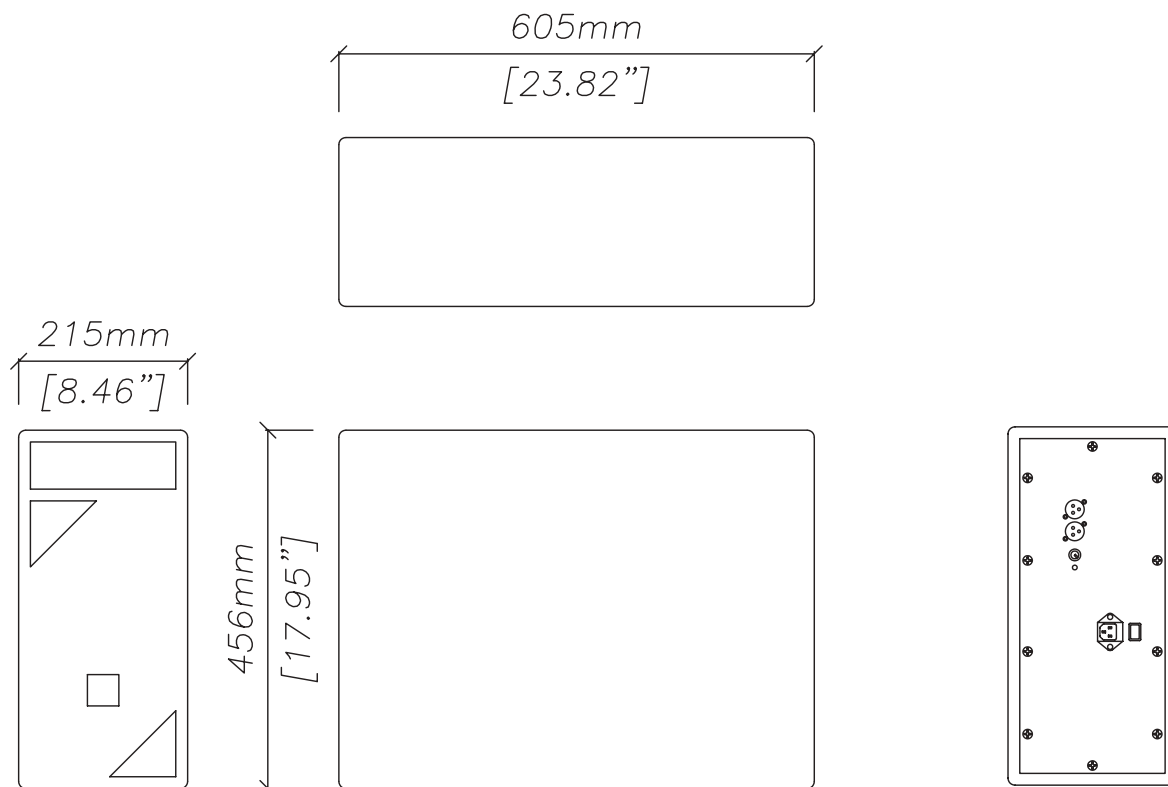

CS256P

CS265P

Century Point, Halifax Road, Cressex Business Park,  
High Wycombe, Buckinghamshire HP12 3SL, England.  
Telephone: +44 (0)1494 535312 Facsimile: +44 (0)1494 438669  
E-mail: [info@martin-audio.com](mailto:info@martin-audio.com)  
All information is Copyright © 2003 Martin Audio Ltd.



# CS265P

Powered, ultra-compact sub-bass

## technical specifications

TYPE	Powered, ultra-compact sub-bass system
FREQUENCY RESPONSE	60Hz-120Hz $\pm$ 3dB 55Hz @ -10dB
DRIVERS	2 x 6.5" (165mm) long excursion drivers
POWER MODULE	150 watts RMS into 4 ohms
MAXIMUM SPL	113dB continuous, 119dB peak
ACTIVE FILTERS	30Hz high-pass, 150Hz low-pass
ENCLOSURE	44 litre, particle board construction
FINISH	Textured black paint
CONNECTORS	IEC mains receptacle 2 x XLR inputs
DIMENSIONS	(W) 215mm x (H) 456mm x (D) 605mm (W) 8.5ins x (H) 18ins x (D) 23.8ins
WEIGHT	19kg (41.8lbs)

## accessories

HTKCS265                      Mounting Bracket

## architectural and engineering specifications

The loudspeaker system shall be of the vented enclosure sub-bass type consisting of two 6.5" (165mm) long excursion low frequency transducers mounted on internal baffles. The loudspeaker system shall be powered by an internally mounted 150 watts RMS power module.

Performance of the loudspeaker system shall meet or exceed the following criteria:  
 Frequency response measured 1 metre on axis shall be 60Hz-120Hz  $\pm$  3dB.  
 Maximum SPL measured at 1 metre on axis shall be 113dB continuous, 119dB peak.  
 Dimensions (W) 215mm x (H) 456mm x (D) 605mm (8.5ins x 18ins x 23.8ins).  
 Weight 19kg (41.8lbs).

The loudspeaker system shall be the Martin Audio CS265P.

### Notes

- (1) Measured on-axis in half space at 2 metres, then referred to 1 metre.
- (2) AES Standard ANSI S4.26-1984.
- (3) Measured in half space conditions at 2 metres with 1 watt input, using band limited pink noise, then referred to 1 metre.
- (4) Measured in half space conditions at 2 metres using band limited pink noise, then referred to 1 metre.

### Trade Descriptions Act

Due to Martin Audio's policy of continuing improvement, we reserve the right to alter these specifications without prior notice. Martin Audio is committed to refining state of the art sound reinforcement, combining in-depth product and field applications research with advanced manufacturing techniques. Every Martin Audio product is built to the highest manufacturing standards and rigorously tested to ensure that it meets the performance criteria specified in the design.

Century Point, Halifax Road, Cressex Business Park,  
 High Wycombe, Buckinghamshire HP12 3SL, England.  
 Telephone: +44 (0)1494 535312 Facsimile: +44 (0)1494 438669  
 E-mail: [info@martin-audio.com](mailto:info@martin-audio.com)  
 All information is Copyright © 2003 Martin Audio Ltd.

