

Provisional rigging notes for the W8LCI

The W8LCI differs from the standard touring W8LC in that it uses special M10 bolts to link cabinets together instead of the usual quick release pins. These bolts screw into locking nuts that are integral to the W8LCI cabinet brackets.


The W8LCI conforms to BGVC1 for 12 cabinets.

Notes:

- 1) The M10 bolts are specially made for Martin Audio W8LCI loudspeakers. Do not use ordinary M10 bolts as substitutes. The bolts should be fully tightened using the key provided.**
- 2) Quick release pins (supplied with the W8LC Grid Assembly) are still used to attach the top W8LCI cabinet's rear splay arms to the grid assembly. The grid's front tongues are attached to the cabinet using the special M10 bolts.**

Installers should read the *W8LC Flying System User's Guide* for an overview before attempting to rig the W8LCI. The W8LC Flying System User's Guide will be found on the *Martin Audio User Guides CD* despatched with every Martin Audio product.

The W8LCI is hinged at the front using the special M10 bolts. W8LCI systems use a combination of splay arm and rear bracket holes to set cabinet-to-cabinet splay angles.

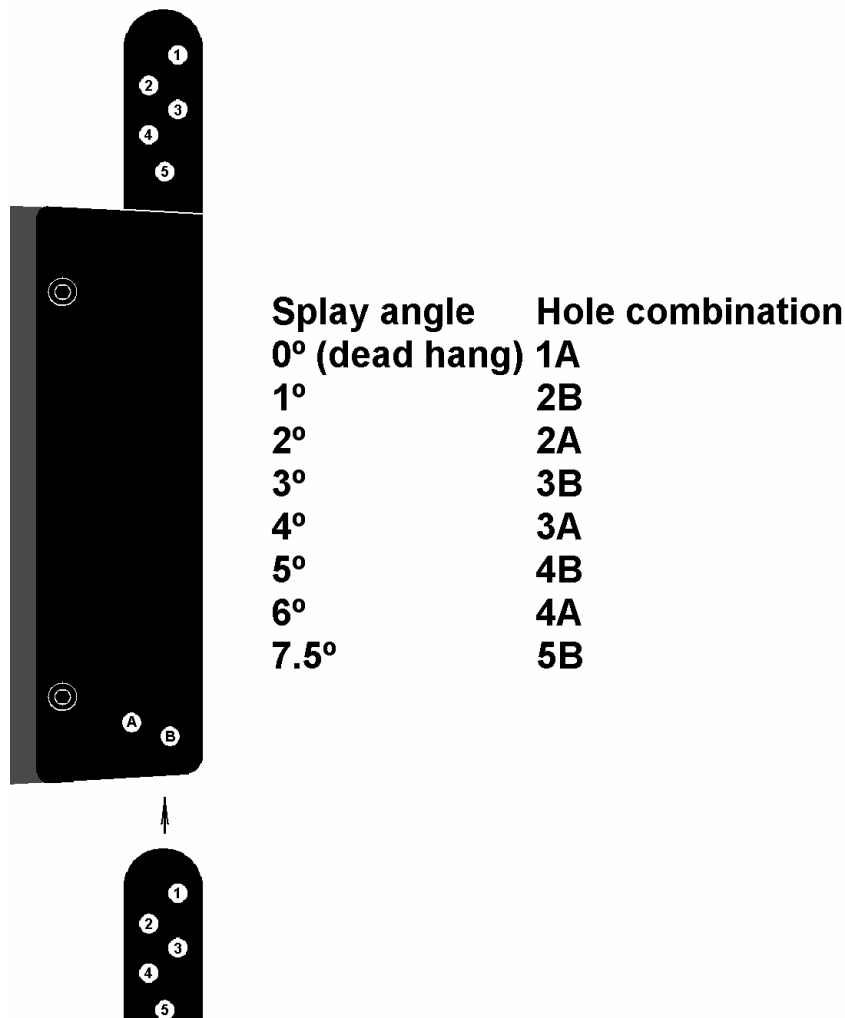

See next page for compatibility notes...

W8LCI/W8LCDI Compatibility Notes

Please note that installation (“I”) version rigging systems are not usually directly compatible with touring W8LM/LMD, W8LC/LCD or WSX cabinets. There are some exceptions but purchasers should avoid mixing touring and installation (“I”) cabinets.

Please also note that installation (“I”) series products cannot usually be retrofitted with touring version rigging brackets and vice versa.

If you are in doubt about how *fixed* an installation is likely to remain – will it be moved from theatre to concert hall etc within the same entertainment complex, for instance? – play safe and specify the touring version.

W8LCI/LCDI – W8LC Grid Assembly

The W8LCI and W8LCDI can be flown from a nother W8LCI or W8LCDI or may be flown from a standard W8LC Grid (W8LCGRIDASSEMBLY).

Although special FAA20002 M10 bolts are used to link “I” version cabinets together, touring version HTK175 pip-pins must be used to link the top cabinet to the rear points of the W8LC Grid.

W8LCI/LCDI – WLX subwoofer

At present, W8LCI and W8LCDI cabinets **cannot** be flown from standard WLX subwoofers – neither via an ASF20003 Combination Grid nor via ASF20005 L-brackets.

This situation is under review.

Please contact info@martin-audio.com for further information.

For stacking information, [click here](#).