

THH

Three-way bi-amp trapezoid Hybrid® fully horn loaded

TH SERIES

Features

- All-horn three-way system
- 'Phase-ball' loaded mid-driver
- Hybrid® LF section
- Fitted with handles and castors
- Horizontal format
- Five year limited warranty

Applications

- Larger club performance
- Large scale installs



THH is a very high performance, all-horn, three-way system in a single, horizontally formatted, wide-bandwidth package.

The driver complement has been engineered for exemplary performance in all bands.

The Hybrid® low frequency section comprises a horn-loaded 15" (380mm)/4" (100mm) voice coil driver that is reflex loaded to extend the LF output to below the natural horn cut-off point. The LF driver features a water resistant cone and triple roll surround for increased excursion.

The mid-horn of the THH has a unique 'phase-ball' loading device which maintains the constant directivity characteristics of the horn at the upper end of its range. It is driven by a 10" (250mm) midrange driver with an aluminium demodulating ring for improved high-mid clarity and reduced distortion when driven hard. The 70° x 40° HF section of the THH features a neodymium 1" (25mm) exit compression driver with a Kapton diaphragm for high sensitivity and extended HF performance.

The internal mid/ high passive crossover allows this three-way system to be driven in a bi-amp configuration.

The THH is configured in a horizontally formatted, trapezoidal birch ply cabinet and fitted with twelve M10 inserts to facilitate ease of mounting. The enclosure has generous pocket handles on the ends and rear castors are fitted as standard.

A Martin Audio iK42 or VIA5002/5004 are the recommend amplifier partners with the DX range of controllers also compatible.

Martin Audio Ltd
Century Point, Halifax Road, High Wycombe
Buckinghamshire HP12 3SL, England

Telephone: +44 (0) 1494 535 312
Facsimile: +44 (0) 1494 438 669
Email: info@martin-audio.com

All information is Copyright © 2018 Martin Audio Ltd.



www.martin-audio.com

THH

Three-way bi-amp trapezoid Hybrid® fully horn loaded







TH SERIES

Technical Specifications

TYPE	Three-way bi-amp trapezoid Hybrid® fully horn loaded
FREQUENCY RESPONSE (5)	50Hz-18kHz $\pm$ 3dB
DRIVERS	15" (380mm)/4" (100mm) coil bass driver 10" (250mm)/2.5" (63.5mm) coil mid driver 1" (25mm) exit HF compression driver
RATED POWER (2)	LF: 750W AES, 3000W peak MF + HF: 300W AES, 1200W peak
RECOMMENDED AMPLIFIER	iK42 / VIA5002/5004
SENSITIVITY (6)	LF: 104dB, MF + HF: 104dB
MAXIMUM SPL (9)	133dB continuous, 139dB peak
NOMINAL IMPEDANCE	LF: 8 ohms, MF + HF: 8 ohms
DISPERSION (-6dB)	70° horizontal, 40° vertical
CROSSOVER	200Hz active, 2kHz passive
ENCLOSURE	250 litre, multi-laminate birch ply
FINISH	Textured black paint
PROTECTIVE GRILLE	Black perforated steel
CONNECTORS	2 x Neutrik NL4
PIN CONNECTIONS	LF+, - : 1+, 1- (MF + HF) +, - : 2+, 2-
FITTINGS	12 x M10 inserts 4 x 4" (100mm) castors 4 x pocket handles
DIMENSIONS (inc wheels)	(W) 1067mm x (H) 558mm x (D) 780mm (908mm) (W) 42ins x (H) 22ins x (D) 30.7ins (35.7ins)
WEIGHT	77.5kg (170.5lbs)

Architectural Specifications

The loudspeaker system shall be of the trapezoidal three-way bi-amp Hybrid® fully horn-loaded type, horizontally formatted and consisting of one 15" (380mm)/4" (100mm) voice coil horn and reflex loaded low frequency transducer, one 10" (250mm)/2.5" (63.5mm) voice coil horn loaded mid frequency transducer with a "phase-ball" loading device and one 1" (25mm) exit HF compression driver mounted on a constant directivity horn. The enclosure shall be of a multi-laminate birch ply construction with threaded inserts to simplify mounting and fitted with 4 pocket handles and 4" (100mm) castors for easy deployment. The loudspeaker shall be operated with a separate electronic controller or amplifier providing a 200Hz crossover between low and mid/high frequency sections. The mid and high frequency sections shall be integrated by an internal 2kHz passive crossover network. Performance of the loudspeaker system with its electronic controller or amplifier shall meet or exceed the following criteria: Frequency response measured 1 metre on axis shall be 50Hz-18kHz $\pm$ 3dB. High frequency dispersion at -6dB points shall be 70°H x 40°V. Power handling shall be 750W AES, 3000W peak LF, 300W AES, 1200W peak MF + HF. Rated impedance shall be 8 ohms LF, 8 ohms MF + HF. Maximum SPL calculated at 1 metre on axis shall be 133dB continuous, 139dB peak. Dimensions (W) 1067mm x (H) 558mm x (D) 780mm (42ins x 22ins x 30.7ins). Weight 77.5kg (170.5lbs). The loudspeaker system shall be the Martin Audio THH.

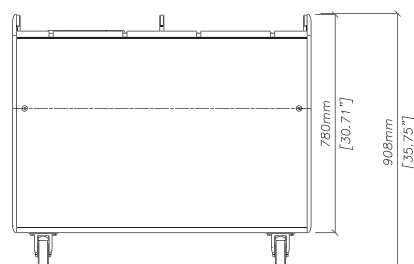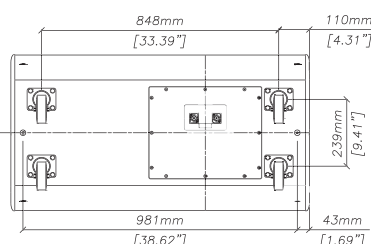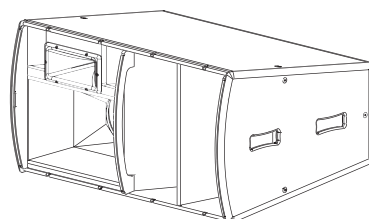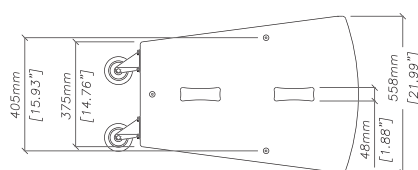

ALL DETAIL TYPICAL TO BOTH ENDS

THH

Notes

- (1) Measured on-axis in half space at 2 metres, then referred to 1 metre.
- (2) AES Standard ANSI S4.26-1984.
- (3) Measured in half space at 2 metres with 1 watt input, using band limited pink noise, then referred to 1 metre.
- (4) Measured in half space at 2 metres using band limited pink noise, then referred to 1 metre.
- (5) Measured on-axis in open (4π) space at 2 metres, then referred to 1 metre.
- (6) Measured in open (4π) space at 2 metres with 1 watt input, using band limited pink noise, then referred to 1 metre.
- (7) Measured in open (4π) space at 2 metres using band limited pink noise, then referred to 1 metre.
- (8) Measured in open (4π) space at 2 metres with 2.83V input, using band limited pink noise, then referred to 1 metre.
- (9) Calculated at 1 metre.

Martin Audio Ltd
Century Point, Halifax Road, High Wycombe
Buckinghamshire HP12 3SL, England

Telephone: +44 (0) 1494 535 312
Facsimile: +44 (0) 1494 438 669
Email: info@martin-audio.com

All information is Copyright © 2018 Martin Audio Ltd.



www.martin-audio.com