

IK42DIST32UK

DISTRO FOR iK42 AND iK41 - ROW VERSION

Features

- 2U distro used to supply power and take the output from three iK42 and iK41 amplifiers

Front Panel

- 32A three-phase Ceeform power input
- 3 x NL8 output
- 6 x NL4 output
- All loudspeaker channels wired in parallel across output types



Rear Panel

- 6 x NL4 tails
- 3 x 32A powerCON tails
- 3 x IEC outputs

Applications


- Touring and installation of Wavefront Precision series

Contents

- 1 x IK42DIST32UK

Technical Specifications

WEIGHT	7kg/15.4lbs
DIMENSIONS	(H) 88mm x (W) 440mm x (D) 250mm
	(H) 3.4" x (W) 17.3" x (D) 9.8"

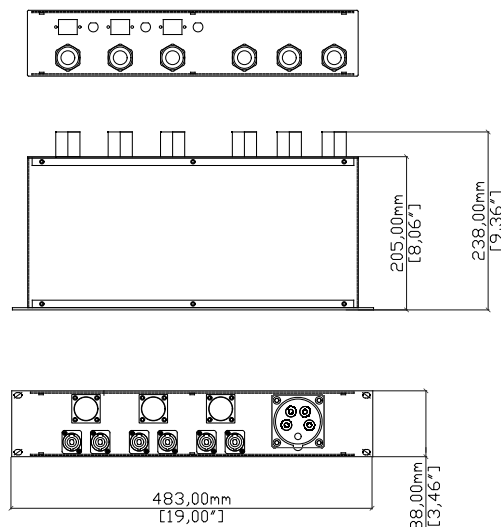

Martin Audio Ltd
Century Point, Halifax Road, High Wycombe
Buckinghamshire HP12 3SL, England

Telephone: +44 (0) 1494 535 312
Email: info@martin-audio.com

All information is Copyright © 2024 Martin Audio Ltd.



www.martin-audio.com